

ts Depot 610-495-8790


American Standard Toilets

irts Depot

610-495-8790


w

New Compton

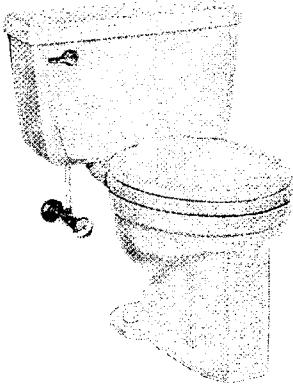


**Non-Ventaway
2125 Combo
4049 Tank**

Cadet

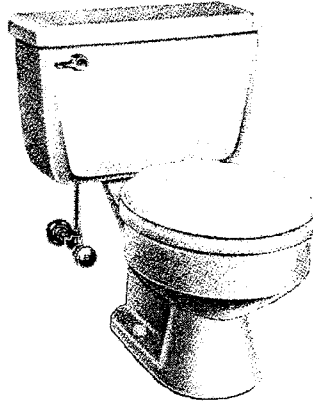


**Non-Ventaway
2108/2109/2120/2122/2124 Series
4049 Tank**

Siacto/Modernus

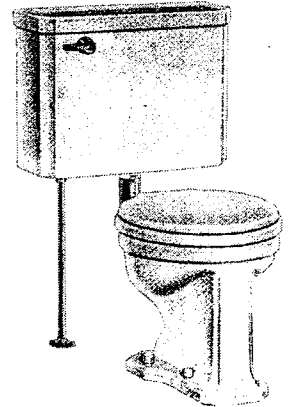


**2180/2186 Combo
4050 Tank**

Compact

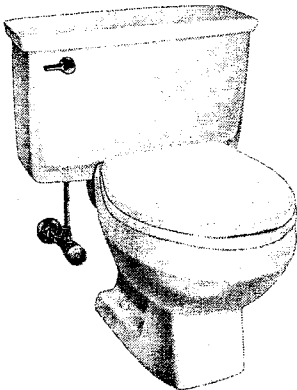


**2052/2053 Combo
4052 Ventaway Tank
4052 Non-Ventaway Tank**

Compact



4050 Tank

Compact




4070 Tank


s Depot 610-495-8790

Tank Number Locations

The tank number can be located on the inside of the tank lid or on the back wall of the tank near the water line. This should be a 4 digit number in a 2000 series for 1 piece toilets or a 4000 series for 2 piece toilets.

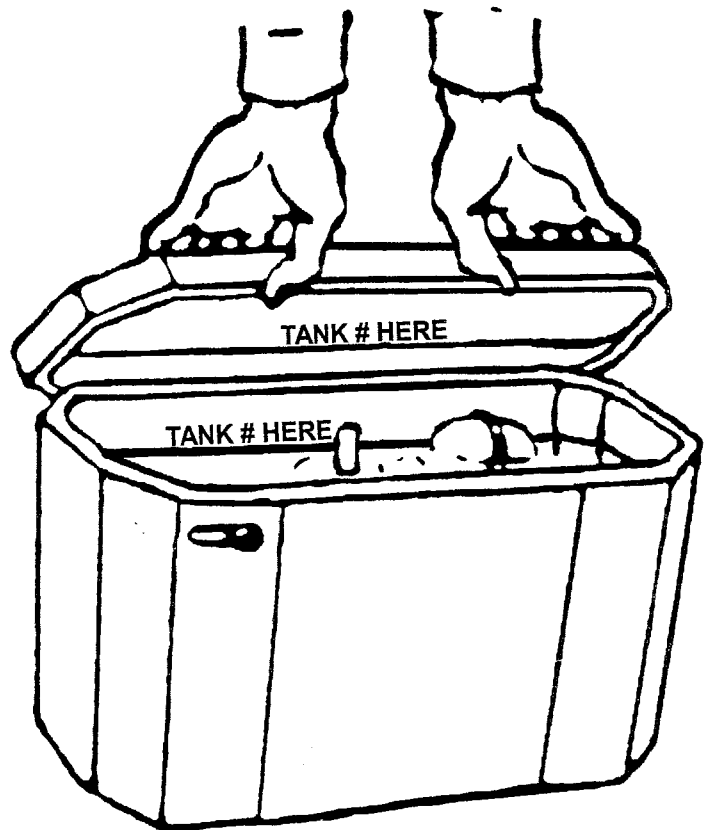


Vent-Away toilet ventilator

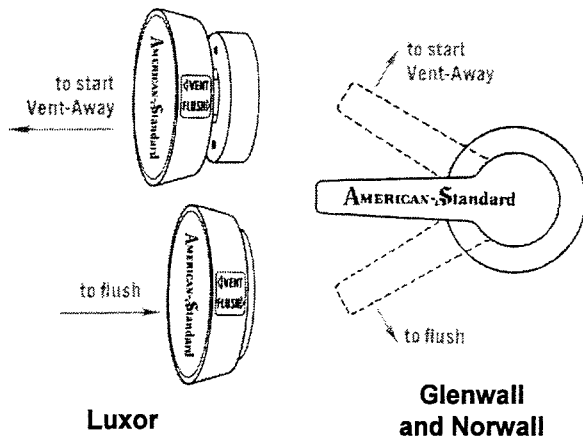

To Start Vent-Away action, pull flushing button outward, or raise trip lever. In approximately ten seconds ventilating action will begin.

To Stop Vent-Away action, push the flushing button in or lever down. This will stop the ventilating action and produce a flush cycle. The button or lever returns to neutral position.

To Flush without using Vent-Away, push the flushing button in or down in the normal manner. Toilet bowl can be flushed at anytime without using the ventilator.

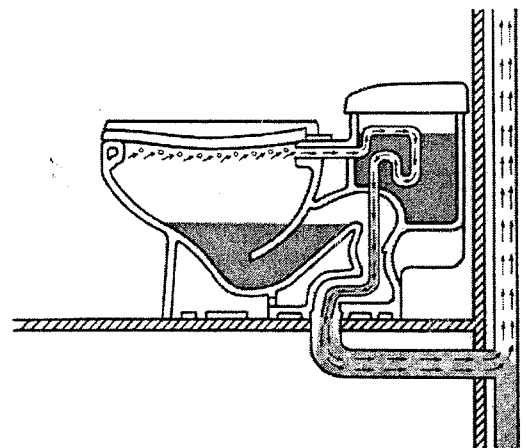

At the start of Vent-Away action, water is drawn out of a trap in the Vent-Away by a jet aspirator. Within ten seconds, a vacuum is created which draws air (and odors) back through holes in the flushing rim of the toilet bowl.

The air carries all the odors with it, into the discharge outlet of the toilet. The odors are then expelled through the vent pipe ... out of the bathroom.